

Seismic Analysis of G+5 Steel Structure using Bracings

Dr(Mrs). D. Brindha

Assistant Professor, Dept of Civil Engineering
Thiagarajar College of Engineering
Madurai, India

Mr. Adarsh Paul

PG Student, Dept of Civil Engineering
Thiagarajar College of Engineering
Madurai, India

Abstract—This paper compares the lateral drift, strain energy released and the stress in the elements of the G+5 steel structure using different orientation of bracings in ANSYS 14.5 to find the most optimum orientation.

Keywords—ANSYS 14.5, Lateral drift, Seismic analysis, steel structure, bracing profiles

I. INTRODUCTION

One of the most devastating natural disasters that occur in the world is earthquakes that are generated due to the movement of tectonic plates that lie below the crust and also due to volcanic activity. They have different durations lasting from a few seconds to minutes and also of varying intensity. The ground experiences shaking under the effect of earthquakes which causes structures to experience high frequency movements induced by the inertial forces in the structure and its components, i.e., the structure's tendency to remain in its original position irrespective of ground movement. One of the main difficulties when a building is a seismically active zone is the lateral stability of the structure. This is due to external forces by the earthquakes that cause large deflections which in turn cause large internal forces in the structure. Any structure has its own displacement capacity, i.e., the amount of horizontal displacement induced is limited. This is addressed by using bracings that have large plastic deformation before failure and they are categorized into the eccentric, concentric and knee braced systems. This paper will consider only concentric braced systems.

The X bracing system is found to have the most reduction in lateral sway but it increases the axial load in columns^[1]. The pushover analysis, i.e., on a steel frame has found that there is a 70-80 % reduction in displacement of braced frames using iSA, ISMV & ISMB sections as bracings^[2]. X Bracing is found to be the most effective in reducing sway at the top in low rise^[3]. Knee braced frames are found to be favourable when compared to conventional and unbraced frames^[4]. Diagonal bracings arranged in a diagonal pattern reduce bending moment, shear force and lateral displacement for high rise structures^[5]. High rise structures best reduction in displacement when using braced frames^[6]. Analysis of high rise structures using Y

bracings in pushover analysis shows that the energy absorbing is higher when compared to conventional and unbraced frames^[7]. High rise SMRF structure shows least sway in case of X braced concentric bracing and even inverted V type bracing system also showed promising values^[8].

II. RESEARCH METHODOLOGIES

The G+5 structure was modelled in ANSYS 14.5 with base shear corresponding to zone IV according to IS 1893(Part 1) and the base shear was calculated according to the Cl.6.4.2. Throughout the entire analysis the dimensions used for loads is Newton (N) and for distances is millimetre (mm). The geometric portion of the structure was modelled and the sections chosen were inputted into the software. The meshing of the element sections were given during the input of the sections. The material properties of steel such as Poisson's ratio, Young's Modulus and density are also given as input. Then the meshing of the structure is done and the assigning of the section property and material property along with the number of divisions is also specified. The loading conditions of the structure is then assigned according to Cl.6.4.2 IS 1893 (Part 1) and the base of the structure is fixed. The analysis is done for the unbraced structure and also for the braced structures. The following braced systems are used:

- X Bracings
- V Bracings
- Inverted Bracings
- K Bracings
- Reverse K Bracings
- Diamond Bracings

The most effective bracing that reduces lateral sway when compared to the unbraced structure is to be found by comparing the above mentioned bracing systems.

III. ANALYTICAL STUDY

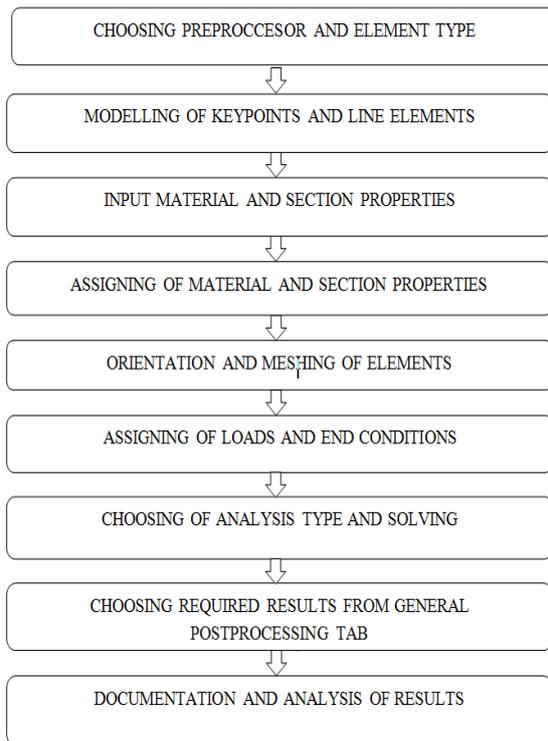


Fig 1. Flow of work in ANSYS

The results are then analysed to find the bracing system with the least deflection along with the corresponding stress in elements and strain energy released

IV. ANALYSIS

A. Data assumed for G+5 Building

1. No. Of storeys=G+5
2. Plan Area of Structure=21x21 m² (C/C d/s)
3. Seismic Zone Area=IV (Delhi)
4. Dimensions of beam =ISMB 300
5. Dimensions of Column= ISHB 400
6. Dimensions of Bracings= ISMB 200
7. Height Of storey= 3.5 m
8. Length of Bay=3.5m
9. No. Of bays= 6

B. Load Conditions

1. Self weight of the components
2. Live load of 2 KN/m as per IS 1893 (Part II)
3. Base shear as per CL 6.4.2 IS 1893 (Part 1)

C. ANSYS Preferences

1. Pre-processing type- Structural
2. Element Type- BEAM189
3. Analysis Type- Static
4. No. of divisions of elements-10
5. Support Conditions of Base- Fixed

Table 1. Sectional and Material Properties

	Beam	Column	Bracings
Name of Section	ISMB 300	ISHB 400	ISMB 200
Height of Section	300 mm	400 mm	200 mm
Breadth of Flange	140 mm	250 mm	100 mm
Thickness of Flange	12.4 mm	12.7 mm	10.8 mm
Thickness of Web	7.5 mm	9.1 mm	5.7 mm
Weight of Section	433.6 N/m	759 N/m	249.2 N/m
Young's Modulus	2*10 ⁵ N/mm ²	2*10 ⁵ N/mm ²	2*10 ⁵ N/mm ²
Poisson's ratio	0.26	0.26	0.26
Density	7.681*10 ⁻⁵ N/mm ³	7.681*10 ⁻⁵ N/mm ³	7.681*10 ⁻⁵ N/mm ³

V. RESULTS AND DISCUSSION

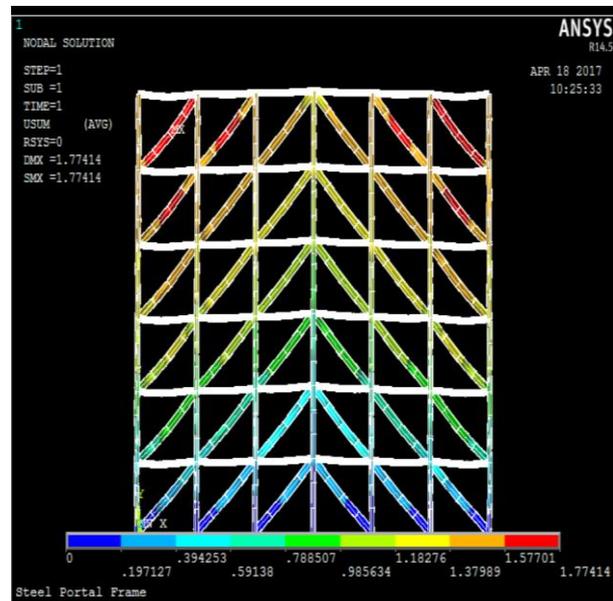


Fig 2. Sample Deflection for Inverted V Bracing System

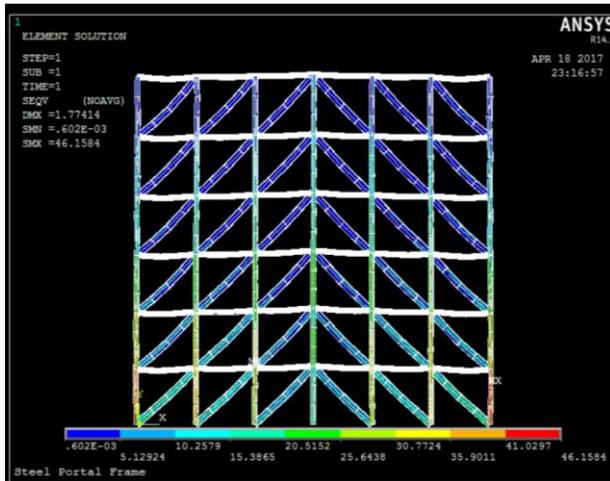


Fig 3. Sample Von Mises Stress in Inverted V Braced Frame (N/mm²)

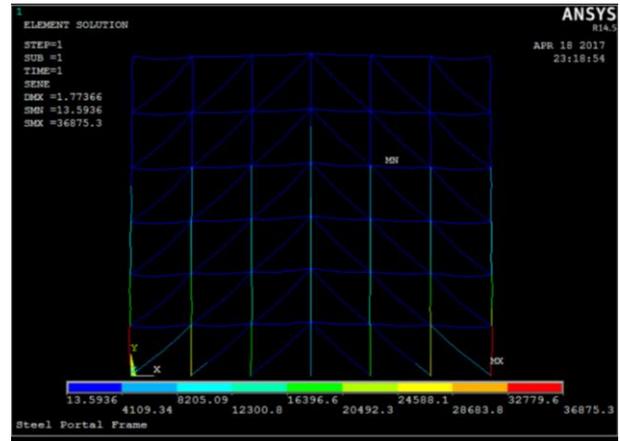


Fig 4. Sample Strain Energy Released in Inverted V Bracing (N-mm)

Table 2. Deflection of storeys in mm

	Unbraced System	X Braced System	Diamond Braced System	K Braced System	Reverse K Braced System	V Braced System	Inverted V Braced System
6th storey	9.2798	1.0209	1.6266	1.901	2.0796	0.95181	1.5232
5th storey	8.486	0.98325	1.5777	1.9349	2.0337	0.90201	1.4957
4th storey	7.1249	0.89729	1.4338	1.9275	1.9791	0.80409	1.3877
3rd storey	5.2615	0.76687	1.2002	1.9317	1.9381	0.66225	1.1979
2nd storey	3.1405	0.573	0.84176	1.4227	1.4086	0.48705	0.91767
1st storey	1.1123	0.32945	0.46252	0.78334	0.75903	0.2839	0.53291

Table 3. Max Von Mises Stress in Components (N/mm²)

	Unbraced	X	Diamond	K	Reverse K	V	Inverted V
Max Stress in components	32.5723	41.984	29.8713	45.662	46.2041	35.6579	46.1584

Table 4. Max Strain Energy released by Structure (N-mm)

	Unbraced	X	Diamond	K	Reverse K	V	Inverted V
Max Strain energy released	12861.8	15657.4	14102.5	12247.6	12384.4	26518	36875.3

1. From the data it is clear that the deflection in V braced is the least but the X braced system also can be effective in reducing sway.
2. The strain energy in V is among the larger of the systems considered and though the X bracing system has a slightly higher deflection the strain energy of itself is slightly higher than the unbraced frame.
3. The strain energy is the least in K and reverse K braced systems, even with strain energy lower than that of the unbraced frame.
4. In terms of the Von Mises stress induced in the components, Diamond braced system has the least, even lower than the unbraced system, while the max stress is induced in reverse K braced system.
5. The Von Mises stress induced in both X and V bracing systems are slightly higher than that of the unbraced system

VI. CONCLUSION

In this study, the G+5 steel structure undergoes least deflection when using the V braced structure. The deflection in the X braced system is only slightly higher than that of the V braced system.

The Von Mises induced in the components when comparing these 2 systems with that of the unbraced system is only slightly higher with the V braced systems being the lesser of the 2.

The strain energy released in the V braced frame varies greatly, releasing more than twice the energy, when compared with the unbraced frames. The X bracing system is only slightly higher than that of the unbraced frame.

Overall the X bracing is to be preferred even though its deflection reduction and Von Mises stress induced is lower than that of V bracing because of the large amount strain energy dissipation in that system.

Acknowledgment

I am grateful to **Dr. B. SIVAGURUNATHAN, Associate Professor and Head**, Department of Civil Engineering, for his support and encouragement to do this thesis work.

I express my deep sense of gratitude to my guide **Dr. D. BRINDHA, Assistant Professor**, Department of Civil Engineering, for her inspiring guidance and encouragement, which has enabled me to do this thesis work.

I like to thank **All Faculties of Civil Engineering Department** for their support and immense co-operation and all those who helped me in all the sense.

And I like to thank all my friends for the support, suggestions and feedbacks for carrying out this thesis work.

References

1. Nauman Mohammed and Islam Nazrul (2013), 'Behaviour of Multi-storey RCC Structure with different type of Bracing Systems (A Software Approach)' *International journal of Innovative Research in Science, Engineering and Technology*, Vol 2. Issue 12, pp 7465-7478.
2. Mohammed Idris Khan and Mr. Khalid Nayaz Khan (2014), 'Seismic Analysis of Steel Frame with Bracings using Pushover Analysis' *International Journal of Advanced in Engineering and Technology*, Volume 2. Issue 7, pp 369-381.
3. Viswanath K.G., Prakash K.R. and Anant Desai (2010), 'Seismic Analysis of Steel Braced Reinforced Concrete Frames', *International Journal of Civil and Structural Engineering*, Vol 1, No 1, pp 114-122.
4. Anitha M. and Divya K.K (2015), 'Study on Seismic Behaviour of Knee Braced Steel Frames', *International Research Journal of Engineering and Technology (IRJET)*, Vol 2, Issue 6, pp 40-45.
5. Adithya M., Swathi Rani K.S, Shruthi H.K, and Dr. Ramesh B.R (2015), 'Study on Effective Bracing Systems for High Rise Steel Structures', *SSRG International Journal of Civil Engineering (SSRG-IJCE)*, Vol 2, Issue 2, pp 19-25.
6. Nitia Bhojkar and Mahesh Bagade (2015), 'Seismic Evaluation of High-Rise Structures by using Steel Bracing System', *International Journal of Innovative Science, Engineering and Technology*, Vol 2, Issue 2, pp 264-269.
7. Gunderao V Nandi and G S Hirenath (2015), 'Seismic Behaviour of Reinforced Concrete Frame with Eccentric Steel Bracings', *International Journal of Civil Engineering*, Vol 2, Issue 2, pp 41-46
8. Ziaulla Khan, B R Narayana and Syed Ahamed Raza (2015), 'Effect of Concentric and Eccentric Type of bracings on Performance Based Seismic Analysis of RC building', *International Journal of Research in Engineering and Technology*. Vol 4, Issue 6, pp 278-283